



ubis
ECOLINE
RANGE

CERTIFICATES



ISO 14.001

It has the aim of controlling all the environmental variables to achieve good environmental performance. It is a working method based on continuous improvement which, by being externally audited, ensures full legal compliance. Likewise, it establishes goals and objectives of an environmental nature that allow the achievement of environmental improvements.

ISO 50.001

It aims to maintain and improve an energy management system in the organization. Its purpose is to allow continued improvement in energy efficiency, energy security, energy use and energy consumption, with a systematic approach.



RECYCLABILITY CERTIFICATE

Our **recyclable** paper tapes, are externally certified through the certification company AENOR according to the regulation AENOR RP E19,01 (2020-11). To ensure the recyclability assessment, production samples are yearly verified by the external certification company.



ISCC PLUS

This certificate ensures the traceability of the recycled materials content throughout the supply chain, as well as obtaining a totally sustainable product. It provides confidence in the veracity of the content of recycled material as it is a certification system audited by an external third party.



FSC®


FSC® (Forest Stewardship Council) is a non-profit and non governmental, independent organization. It promotes responsible forest management with the environment and with society in forests around the world. The aim is to guarantee that forestry management best practices are met, thus contributing to the preservation of woodlands and forest biodiversity.

PEFC

It is a non-governmental organisation, independent and non profit. It undertakes to ensure sustainable forest management, creating socially just, environmentally responsible and economically viable results: the three cornerstones of sustainability.

KRAFT 700/7000

FSC® CERTIFIED AND RECYCLABLE PAPER TAPE, ALSO PRINTABLE.

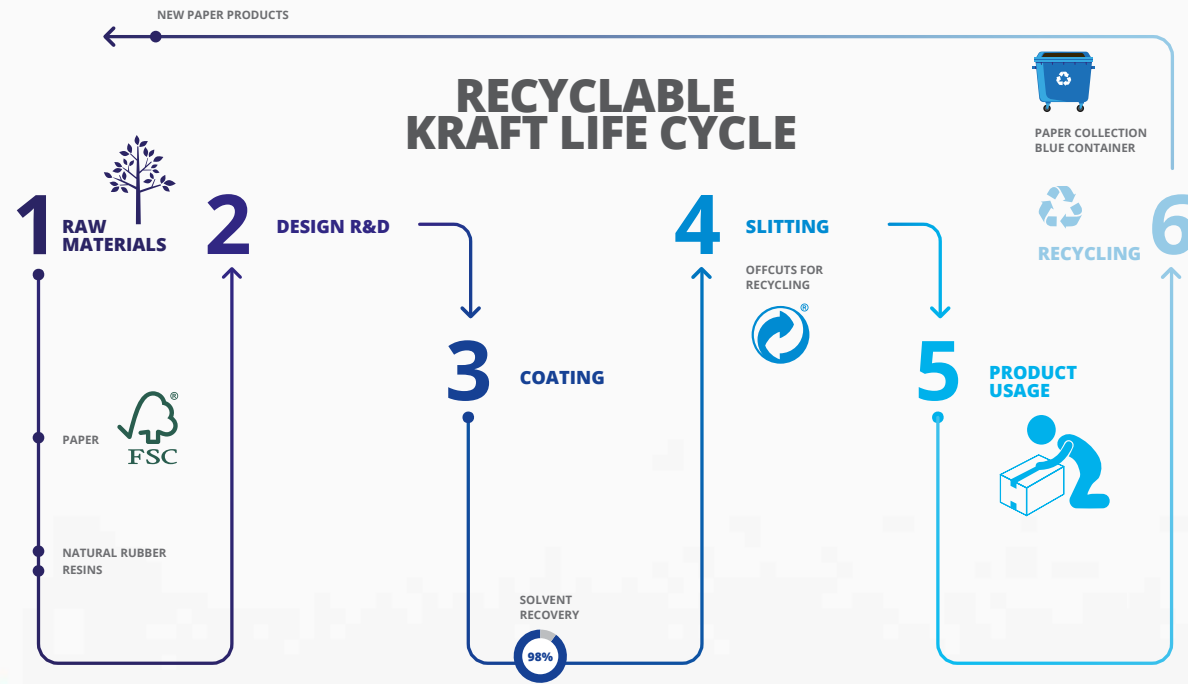

APPLICATIONS

- Kraft paper tape suitable for a sustainable packaging.
- Medium and heavy duty carton sealing tape.
- Suitable either with a manual dispenser or automated application.


ADVANTAGES AND BENEFITS

- FSC® MIX AEN-COC-000330 certified adhesive tape.
- Recyclability – repulpability certified at the end of its usage: AENOR RP E19.01 (2020 – 11).
- It can be deposited into the blue paper recycling container directly for recycling.
- Excellent adhesion to all surfaces.
- Directly printable by flexographic printing method.
- Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.

CONSTRUCTION

- Backing: Premium FSC® certified Kraft paper.
- Adhesive: natural rubber from FSC® certified forestry (700). Synthetic rubber (7000).
- The tape core is made from 100% recycled material.
- Available in brown.

	700	7000
ADHESIVE	NATURAL RUBBER	HOT-MELT
PAPER WEIGHT	70 g/m ²	
TOTAL THICKNESS	120 Microns	
PEEL ADHESION	2,5 N/cm	6,5 N/cm
TENSILE STRENGTH	54 N/cm	
ELONGATION AT BREAK	6 %	
SERVICE TEMPERATURE	-30°C / +65°C	-10°C / +60°C



REINFORCED 7200

FSC® REINFORCED PRINTABLE PAPER TAPE



06



07

APPLICATIONS

- Certified paper backing suitable for a sustainable packaging.
- Backing reinforced with uniaxially oriented fiberglass.
- Medium and heavy-duty carton sealing tape.
- Designed to make safe shipments through the e-commerce.
- Suitable either with a manual dispenser or automated application.


ADVANTAGES AND BENEFITS

- FSC® MIX AEN-COC-000330 certified adhesive tape.
- Excellent adhesion to all surfaces.
- Reinforced paper for secure and durable closure.
- Directly printable by flexographic printing method.
- Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.

CONSTRUCTION

- Backing: FSC® certified paper.
- The tape core is made from 100% recycled material.
- Reinforcement: Uniaxially oriented fiberglass.
- Adhesive: Synthetic rubber.
- Color: White and Brown.

7200	
ADHESIVE	SYNTHETIC RUBBER
PAPER WEIGHT	60 g/m ²
TOTAL THICKNESS	135 Microns
PEEL ADHESION	7,0 N/cm
TENSILE STRENGTH	80 N/cm
ELONGATION AT BREAK	5 %
SERVICE TEMPERATURE	-10°C / +60°C



MASKING 7150

FSC® CERTIFIED PRINTABLE PAPER TAPE



APPLICATIONS

- Masking paper tape suitable for a **sustainable** packaging or painting jobs.
- Light and medium weight packaging sealing tape.
- Suitable either with a manual dispenser or automated application.
- Utility grade masking tape, used on a variety of surfaces for general purpose masking.
- Miscellaneous industrial applications.

ADVANTAGES AND BENEFITS

- FSC® MIX AEN-COC-000330 certified adhesive tape.
- Excellent adhesion to all surfaces.
- **Directly printable** by flexographic printing method.
- Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.

CONSTRUCTION

- Backing: Premium FSC® certified masking paper.
- Adhesive: Synthetic rubber.
- Color: White and Brown.



MASKING 7150	
PAPER WEIGHT	60 g/m²
TOTAL THICKNESS	110 Microns
PEEL ADHESION	5,5 N/cm
TENSILE STRENGTH	50 N/cm
ELONGATION AT BREAK	10 %
SERVICE TEMPERATURE	-10°C / +50°C

KRAFT 7250

FSC® REINFORCED PRINTABLE PAPER TAPE



APPLICATIONS

- Certified Kraft paper backing suitable for a **sustainable** packaging.
- Backing reinforced with uniaxially oriented **fiberglass**.
- Medium and heavy-duty carton sealing tape.
- Designed to make safe shipments through the e-commerce.
- Suitable either with a manual dispenser or automated application.

ADVANTAGES AND BENEFITS

- FSC® MIX AEN-COC-000330 certified adhesive tape.
- Excellent adhesion to all surfaces.
- Reinforced paper for secure and durable closure.
- **Directly printable** by flexographic printing method.
- Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.

CONSTRUCTION

- Backing: Premium FSC® certified Kraft paper.
- The tape core is made from 100% recycled material.
- Reinforcement: Uniaxially oriented fiberglass.
- Adhesive: Synthetic rubber.
- Color: Brown.



KRAFT 7250	
PAPER WEIGHT	70 g/m²
TOTAL THICKNESS	160 Microns
PEEL ADHESION	10,0 N/cm
TENSILE STRENGTH	165 N/cm
ELONGATION AT BREAK	6 %
SERVICE TEMPERATURE	-10°C / +50°C

KRAFT 4855

REINFORCED KRAFT PAPER TAPE 100% PEFC CERTIFIED 50% RECYCLED PAPER



APPLICATIONS


- Fiber-glass reinforced paper tape for a secure packaging.
- Suitable either for manual application or automated packaging systems.
- Suitable for heavy duty packaging.
- Specially designed to be used on the e-commerce.

ADVANTAGES AND BENEFITS

- 100% PEFC CERTIFIED paper adhesive tape.
- 50% RECYCLED paper content from certified and sustainable sources.
- Extreme adhesion power to all surfaces, including the recycled cardboard.
- The tape protects the packaging content working as a temper evident seal.
- Easy to apply with conventional manual tape dispensers anywhere and on any surface.

CONSTRUCTION

- Backing: Fiber-glass reinforced 100% PEFC certified paper with 50% RECYCLED content.
- The tape core is made from 100% recycled material.
- Adhesive: Synthetic rubber. Special formula for an extreme peel and adhesion power.
- Color: Brown.



KRAFT 4850

REINFORCED KRAFT PAPER TAPE 100% PEFC CERTIFIED



APPLICATIONS


- Fiber-glass reinforced paper tape for a secure packaging.
- Suitable either for manual application or automated packaging systems.
- Suitable for heavy duty packaging.
- Specially designed to be used on the e-commerce.

ADVANTAGES AND BENEFITS

- 100% PEFC certified adhesive tape.
- Paper comes from certified sustainable sources.
- Extreme adhesion power to all surfaces, including the recycled cardboard.
- The tape protects the packaging content working as a temper evident seal.
- Easy to apply with conventional manual tape dispensers anywhere and on any surface.

CONSTRUCTION

- Backing: Fiber-glass reinforced 100% PEFC certified paper.
- The tape core is made from 100% recycled material.
- Adhesive: Synthetic rubber. Special formula for an extreme peel and adhesion power.
- Colour: brown.



CELOFAN 1600

BIO-ORIGIN CELLULOSE TAPE



APPLICATIONS

- General purpose stationary tape.
- Sustainable tape for light and medium weight packaging.

ADVANTAGES AND BENEFITS

- 100% PEFC certified adhesive tape.
- Excellent adhesion.
- Good tack.
- Long lasting adhesion.
- Hand tearable.

CONSTRUCTION

- 100% PEFC Certified cellulose based film.
- The tape core is made from 100% recycled material.
- Adhesive: Synthetic rubber.
- Color: Transparent.



	4855	4850
PAPER WEIGHT	60 g/m ²	60 g/m ²
TOTAL THICKNESS	240 Microns	240 Microns
PEEL ADHESION	> 16 N/cm	> 16 N/cm
TENSILE STRENGTH	115 N/cm	115 N/cm
ELONGATION AT BREAK	5 %	5 %
SERVICE TEMPERATURE	-10°C / +60°C	-10°C / +60°C

* TECHNICAL INFORMATION ON PAGE 15.

PP 723/726 ISCC PLUS

AENOR

Empresa Registrada

LINIE-EN ISO 9001

AENOR

Gestión Ambiental

LINIE-EN ISO 14001

50% BIO-BASED PLASTIC

ISCC CERTIFIED

MASS BALANCE APPROACH

50% RECYCLED ISCC PLUS* CERTIFIED BIO-CIRCULAR POLYPROPYLENE

- APPLICATIONS
- Recycled polypropylene backing for bio-circular packaging certified by ISCC PLUS.
 - Light and medium duty carton sealing tape.
 - Suitable either with a manual dispenser or automated application.
- ADVANTAGES AND BENEFITS
- ISCC PLUS certified adhesive tape** with 50% recycled film*.
 - Traceability to the origin of the recycled material for the backing: CIRCULAR FILM.
 - At the end of the product's lifetime, it can be deposited into the plastic recycling container to be **completely recycled** using mechanical or chemical recycling.
 - Excellent adhesion to all surfaces.
 - Light film** developed for sustainable packaging.
 - Directly printable by the standard flexo printing method. (only for PP 726)
- CONSTRUCTION
- Backing: 50% recycled certified polypropylene certified by ISCC PLUS*.
 - The tape core is made from 100% recycled material.
 - Adhesive: **Natural rubber.**
 - Colour: Clear, white or brown.
- * Mass balance approach.



	PP 723 ISCC	PP 726 ISCC
TOTAL THICKNESS	38 Microns	41 Microns
PEEL ADHESION	2,3 N/cm	2,3 N/cm
TENSILE STRENGTH	38 N/cm	38 N/cm
ELONGATION AT BREAK	150 %	150 %
SERVICE TEMPERATURE	-30°C / +65°C	-30°C / +65°C

PE 725/728 ISCC PLUS

AENOR

Empresa Registrada

LINIE-EN ISO 9001

AENOR

Gestión Ambiental

LINIE-EN ISO 14001

100% BIO-BASED PLASTIC

ISCC CERTIFIED

MASS BALANCE APPROACH

100 % RECYCLED ISCC PLUS* CERTIFIED CIRCULAR POLYETHYLENE

- APPLICATIONS
- Recycled polyethylene backing for circular packaging certified by ISCC PLUS.
 - Light and medium duty carton sealing tape.
 - Suitable either with a manual dispenser or automated application.
- ADVANTAGES AND BENEFITS
- ISCC PLUS certificated adhesive tape** with 100% recycled film*.
 - Traceability to the origin of the recycled material for the backing: CIRCULAR FILM.
 - At the end of the product's lifetime, it can be deposited into the plastic recycling container to be **completely recycled** using mechanical or chemical recycling.
 - Excellent adhesion to all surfaces.
 - Light film** developed for sustainable packaging.
 - Directly printable by the standard flexo printing method. (only for PE 728)
- CONSTRUCTION
- Backing: 100% recycled polyethylene certified by ISCC PLUS*.
 - The tape core is made from 100% recycled material.
 - Adhesive: **Natural rubber.**
 - Colour: Clear, white or brown.
- * Mass balance approach.



	PE 725 ISCC	PE 728 ISCC
TOTAL THICKNESS	40 Microns	40 Microns
PEEL ADHESION	2,3 N/cm	2,3 N/cm
TENSILE STRENGTH	45 N/cm	45 N/cm
ELONGATION AT BREAK	90 %	90 %
SERVICE TEMPERATURE	-30°C / +65°C	-30°C / +65°C

TECHNICAL INFORMATION

FSC®



The mark of responsible forestry

KRAFT 700

ADHESIVE	NATURAL RUBBER FROM FSC® CERTIFIED FORESTRY
PAPER WEIGHT	70 g/m²
TOTAL THICKNESS	120 Microns
PEEL ADHESION	2,5 N/cm
TENSILE STRENGTH	54 N/cm
ELONGATION AT BREAK	6 %
SERVICE TEMPERATURE	-30°C / +65°C



- Premium FSC® certified Kraft paper tape for a sustainable packaging.
- Recyclability – repulpability certified at the end of its usage: AENOR RP E19.01 (2020 – 11).
- It can be deposited into the blue paper recycling container directly for recycling.
- Directly printable by the standard flexo printing method.

KRAFT 7000

ADHESIVE	SYNTHETIC RUBBER
PAPER WEIGHT	70 g/m²
TOTAL THICKNESS	120 Microns
PEEL ADHESION	6,5 N/cm
TENSILE STRENGTH	54 N/cm
ELONGATION AT BREAK	6 %
SERVICE TEMPERATURE	-10°C / +60°C



- Premium FSC® certified Kraft paper tape for a sustainable packaging.
- Recyclability – repulpability certified at the end of its usage: AENOR RP E19.01 (2020 – 11).
- It can be deposited into the blue paper recycling container directly for recycling.
- Directly printable by the standard flexo printing method.

REINFORCED 7200

ADHESIVE	SYNTHETIC RUBBER
PAPER WEIGHT	60 g/m²
TOTAL THICKNESS	135 Microns
PEEL ADHESION	7,0 N/cm
TENSILE STRENGTH	80 N/cm
ELONGATION AT BREAK	5 %
SERVICE TEMPERATURE	-10°C / +60°C



- Certified paper backing (reinforced with uniaxially oriented fiberglass), suitable for a sustainable packaging.
- Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.
- Excellent adhesion to all surfaces guaranteeing a secure and durable closure.
- Directly printable by flexographic printing method.

MASKING 7150

ADHESIVE	SYNTHETIC RUBBER
PAPER WEIGHT	60 g/m²
TOTAL THICKNESS	110 Microns
PEEL ADHESION	5,5 N/cm
TENSILE STRENGTH	50 N/cm
ELONGATION AT BREAK	10 %
SERVICE TEMPERATURE	-10°C / +50°C



- Masking paper tape suitable for a sustainable packaging.
- Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.
- Suitable either with a manual dispenser or automated application.
- Directly printable by flexographic printing method.

KRAFT 7250

ADHESIVE	SYNTHETIC RUBBER
PAPER WEIGHT	70 g/m²
TOTAL THICKNESS	160 Microns
PEEL ADHESION	10,0 N/cm
TENSILE STRENGTH	165 N/cm
ELONGATION AT BREAK	6 %
SERVICE TEMPERATURE	-10°C / +50°C



- Certified Kraft paper backing (reinforced with uniaxially oriented fiberglass), suitable for a sustainable packaging.
- Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.
- Suitable either with a manual dispenser or automated application.
- Directly printable by flexographic printing method.

PEFC



Cintas Adhesivas
UBIS SA offers PEFC
certified products
PEFC/14-35-00522 www.pefc.org

KRAFT 4855

ADHESIVE	SYNTHETIC RUBBER
PAPER WEIGHT	60 g/m²
TOTAL THICKNESS	240 Microns
PEEL ADHESION	> 16 N/cm
TENSILE STRENGTH	115 N/cm
ELONGATION AT BREAK	5 %
SERVICE TEMPERATURE	-10°C / +60°C



- Fiber-glass reinforced paper tape for a secure packaging.
- 50% RECYCLED paper content from certified and sustainable sources.
- The tape protects the packaging content working as a temper evident seal.

KRAFT 4850

ADHESIVE	SYNTHETIC RUBBER
PAPER WEIGHT	60 g/m²
TOTAL THICKNESS	240 Microns
PEEL ADHESION	> 16 N/cm
TENSILE STRENGTH	115 N/cm
ELONGATION AT BREAK	5 %
SERVICE TEMPERATURE	-10°C / +60°C



- Fiber-glass reinforced paper tape for a secure packaging.
- Paper comes from certified sustainable sources.
- The tape protects the packaging content working as a temper evident seal.

CELOFAN 1600

ADHESIVE	SYNTHETIC RUBBER
PAPER WEIGHT	40 g/m²
TOTAL THICKNESS	44 Microns
PEEL ADHESION	6,0 N/cm
TENSILE STRENGTH	35 N/cm
ELONGATION AT BREAK	20 %
SERVICE TEMPERATURE	-10°C / +60°C



- Backing: 100% PEFC Certified cellulose based film.
- Good tack with long lasting adhesion.
- Hand tearable: easy tear.

ISCC PLUS



PP 723



ADHESIVE	NATURAL RUBBER
TOTAL THICKNESS	38 Microns
PEEL ADHESION	2,3 N/cm
TENSILE STRENGTH	38 N/cm
ELONGATION AT BREAK	150 %
SERVICE TEMPERATURE	-30°C / +65°C

- ISCC PLUS certificated adhesive tape with 50% recycled film.
- Recycled polypropylene backing for bio-circular packaging certified by ISCC PLUS.
- At the end of the product's lifetime, it can be deposited into the plastic recycling container to be completely recycled using mechanical or chemical recycling.
- Light film developed for sustainable packaging.

PP 726

ADHESIVE	NATURAL RUBBER
TOTAL THICKNESS	41 Microns
PEEL ADHESION	2,3 N/cm
TENSILE STRENGTH	38 N/cm
ELONGATION AT BREAK	150 %
SERVICE TEMPERATURE	-30°C / +65°C



- Recycled polypropylene backing for bio-circular packaging certified by ISCC PLUS.
- ISCC PLUS certificated adhesive tape with 50% recycled film.
- At the end of the product's lifetime, it can be deposited into the plastic recycling container to be completely recycled using mechanical or chemical recycling.
- Light film developed for sustainable packaging.
- Directly printable by the standard flexo printing method.

PE 725

ADHESIVE	NATURAL RUBBER
TOTAL THICKNESS	40 Microns
PEEL ADHESION	2,3 N/cm
TENSILE STRENGTH	45 N/cm
ELONGATION AT BREAK	90 %
SERVICE TEMPERATURE	-30°C / +65°C



- ISCC PLUS certificated adhesive tape with 100% recycled film.
- Recycled polyethylene backing for a circular packaging certified by ISCC PLUS.
- At the end of the product's lifetime, it can be deposited into the plastic recycling container to be completely recycled using mechanical or chemical recycling.
- Light film developed for sustainable packaging.

PE 728

ADHESIVE	NATURAL RUBBER
TOTAL THICKNESS	40 Microns
PEEL ADHESION	2,3 N/cm
TENSILE STRENGTH	45 N/cm
ELONGATION AT BREAK	90 %
SERVICE TEMPERATURE	-30°C / +65°C



- ISCC PLUS certificated adhesive tape with 100% recycled film.
- Recycled polyethylene backing for a circular packaging certified by ISCC PLUS.
- At the end of the product's lifetime, it can be deposited into the plastic recycling container to be completely recycled using mechanical or chemical recycling.
- Light film developed for sustainable packaging.
- Directly printable by the standard flexo printing method.



CINTAS ADHESIVAS UBIS, S.A.

Pol. Lastaola - Apartado 39
20120 Hernani-España

Tel. [0034] 943 335 077
Fax [0034] 943 332 580
info@ubis.es

www.ubis.es



THIS CATALOGUE HAS BEEN PRINTED USING CERTIFIED ENVIRONMENTALLY FRIENDLY PAPER PRODUCED FROM SUSTAINABLY MANAGED FORESTS.

