


TECHNICAL SHEET

TYPICAL APPLICATIONS

- 🔍 Paper tape suitable for a **sustainable** packaging.
- 🔍 Medium and light duty carton sealing tape.
- 🔍 Suitable either with a manual dispenser or automated application.

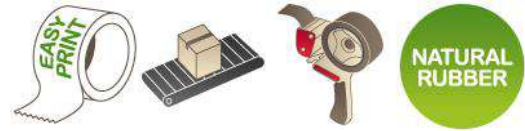

ADVANTAGES AND BENEFITS

- 🔍 FSC® MIX CREDIT AEN-COC-000330 certified adhesive tape.
- 🔍 Excellent adhesion to all surfaces.
- 🔍 **Directly printable** by flexographic printing method.
- 🔍 Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.

CONSTRUCTION

- 🔍 Backing: Premium FSC® certified saturated paper.
- 🔍 Adhesive: FSC® certified Natural rubber.
- 🔍 Color: Available in brown and white.



TECHNICAL DATA

MASKING 760 FSC®	METRIC	TEST METHOD
Paper Thickness	90 Micron	AFERA 5006
Total Thickness	120 Micron	AFERA 5006
Peel Adhesion	2,3 N/cm	AFERA 5001
Tensile Strength	34 N/cm	AFERA 5004
Elongation at Break	10 %	AFERA 5004
Service Temperature	-10°C / +60°C	-



Physical and performance characteristics shown above are obtained following tests recommended by AFERA and UBIS. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.

STORAGE

Tape performance is guaranteed within the first 6 months. Product must be kept in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the 12 digit batch number printed on labels.

SECURITY

Product does not contain any dangerous or unhealthy components. Security data sheets are available based on directive 91/155/EC. All our tapes comply with European 2004/12/CE Packaging directive.