


TECHNICAL SHEET

TYPICAL APPLICATIONS

- ✓ General purpose tape suitable for bundling, sealing, seaming, repairing, holding, plumbing and waterproofing.

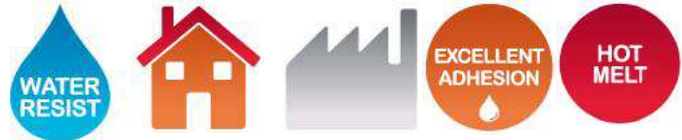


ADVANTAGES AND BENEFITS

- ✓ Excellent adhesion and conformability.
- ✓ Excellent tack.
- ✓ Long lasting adhesion.
- ✓ Waterproof backing
- ✓ Hand tear able.

CONSTRUCTION

- ✓ Backing: Polyethylene reinforced with polyester cloth.
- ✓ Adhesive: Synthetic rubber, solvent free
- ✓ Clear adhesive
- ✓ Silver or black color coextruded polyethylene on open side and white on reverse side

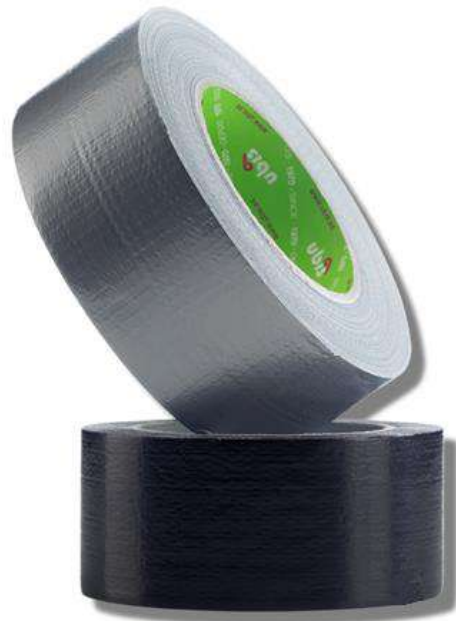

TECHNICAL DATA

6500	METRIC
Film Thickness	55 Micron
Total Thickness	200 Micron
Peel Adhesion	10 N/cm ; 25 N/25mm
Tensile Strength	35 N/cm
Elongation at break	25%
Temperature resistance	From -10°C to +70 °C



Physical and performance characteristics shown above are obtained following tests recommended by AFERA and UBIS. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.

STORAGE

Tape performance is guaranteed within the first 12 months. Product must be kept in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the 12 digit batch number printed on labels.

SECURITY

Product does not contain any dangerous or unhealthy components. Security data sheets are available based on directive 91/155/EC. All our tapes comply with European 2004/12/CE Packaging directive.