


TECHNICAL SHEET

TYPICAL APPLICATIONS

- 9 Kraft paper tape suitable for a **sustainable** packaging.
- 9 Medium and heavy duty carton sealing tape.
- 9 Suitable either with a manual dispenser or automated application.

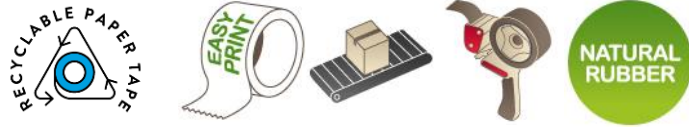

ADVANTAGES AND BENEFITS

- 9 FSC® MIX AEN-COC-000330 certified adhesive tape.
- 9 Certified **recyclable**, a repulpable paper tape at the end of its usage: AENOR RP E19.01 (2020-11).
- 9 It can be deposited into the blue paper recycling container directly for recycling.
- 9 Excellent adhesion to all surfaces.
- 9 **Directly printable** by flexographic printing method.
- 9 Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.

CONSTRUCTION

- 9 Backing: Premium FSC® certified Kraft paper.
- 9 Adhesive: **natural rubber** from FSC® certified forestry.
- 9 The tape core is made from 100% recycled material.
- 9 Available in brown.



TECHNICAL DATA

<i>KRAFT 700</i>	<i>METRIC</i>
Paper Thickness	100 Micron
Paper Weight	70 g/m ²
Total Thickness	120 Micron
Peel Adhesion	2,5 N/cm
Tensile Strength	54 N/cm
Elongation at Break	6 %
Service Temperature	-30°C / +65°C



Physical and performance characteristics shown above are obtained following tests recommended by AFERA and UBIS. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.

STORAGE

Tape performance is guaranteed within the first 6 months. Product must be kept in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the 12 digit batch number printed on labels.

SECURITY

Product does not contain any dangerous or unhealthy components. Security data sheets are available based on directive 91/155/EC. All our tapes comply with European 2004/12/CE Packaging directive.