


TECHNICAL SHEET

TYPICAL APPLICATIONS

- Ultra strong kraft paper tape suitable for a **sustainable** packaging.
- Heavy-duty carton sealing tape.
- Suitable either with a manual dispenser or automated application.

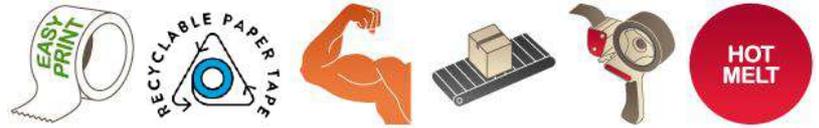

ADVANTAGES AND BENEFITS

- FSC® MIX AEN-COC-000330 certified adhesive tape.
- It can be deposited into the blue paper recycling container directly for recycling.
- Certified **recyclable** as repulpable paper tape at the end of its usage: AENOR RP E19.01 (2020-11).
- It can be deposited into the blue paper recycling container directly for recycling.
- Excellent adhesion to all surfaces.
- Directly printable** by flexographic printing system.
- Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.



CONSTRUCTION

- Backing: Premium **FSC®** certified Kraft paper.
- Adhesive: modified synthetic rubber adhesive system.
- The tape core is made from 100% recycled material.
- Available in brown and white.

TECHNICAL DATA

KRAFT 7090	METRIC	TEST METHOD
Paper Weight	90 g/m ²	-
Total Thickness	145 Micron	AFERA 5006
Peel Adhesion	8,5 N/cm	AFERA 5001
Tensile Strength	65 N/cm	AFERA 5004
Elongation at Break	7 %	AFERA 5004
Service Temperature	-20°C / +60°C	-



Physical and performance characteristics shown above are obtained following tests recommended by AFERA and UBIS. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.

STORAGE

Tape performance is guaranteed within the first 6 months. Product must be kept in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the full digit batch number printed on box labels.

SECURITY

Product does not contain any dangerous or unhealthy components. Security data sheets are available based on directive 91/155/EC. All our tapes comply with European 2004/12/CE Packaging directive.