


## TECHNICAL SHEET

### TYPICAL APPLICATIONS

- Strong kraft paper tape, suitable for heavy duty packaging applications.
- Suitable for manual dispenser or automated application.

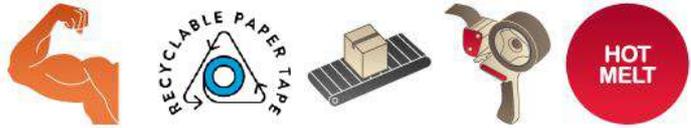

### ADVANTAGES AND BENEFITS

- FSC® MIX AEN-COC-000330 certified adhesive tape.
- High resistance paper for heavy duty applications.
- Excellent adhesion to all surfaces.
- Certified **recyclable**, a repulpable paper tape at the end of its usage: **AENOR RP E19.01 (2020-11)**.
- Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.

### CONSTRUCTION

- Backing: Premium FSC® certified Kraft paper.
- Adhesive: **Synthetic rubber** based adhesive.
- Available Color: Brown.



### TECHNICAL DATA

<i>KRAFT 7145</i>	<i>METRIC</i>	<i>US Customary System</i>	<i>METHOD</i>
Paper Weight	145 g/m <sup>2</sup>	145 g/m <sup>2</sup>	-
Total Thickness	210 Micron	8,2 Mil	AFERA 5006
Peel Adhesion	10,0 N/cm	91,3 oz/inch	AFERA 5001
Tensile Strength	120 N/cm	68,5 lb/mm <sup>2</sup>	AFERA 5004
Elongation at Break	13 %	13%	AFERA 5004
Service Temperature	-20°C / +60°C	-4°F / +140°F	-



Physical and performance characteristics shown above are obtained following tests recommended by AFERA and UBIS. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.

### STORAGE

Tape performance is guaranteed within the first 6 months. Product must be kept in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the 12 digit batch number printed on labels.

### SECURITY

Product does not contain any dangerous or unhealthy components. Security data sheets are available based on directive 91/155/EC. All our tapes comply with European 2004/12/CE Packaging directive.