




MASKING 510

WATER RESIST 100°C MASKING TAPE

TECHNICAL SHEET

TYPICAL APPLICATIONS

- Water Resist masking tape suitable for 100°C 1 hour oven baking in car body shops and other Industrial applications.

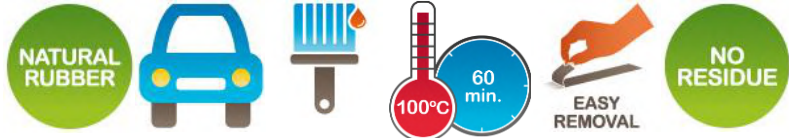

ADVANTAGES AND BENEFITS

- Excellent adhesion to all surfaces.
- Excellent adhesion to paper back side.
- Easy application on curved profiles and irregular surfaces.
- Easy removal.
- No residue.
- Compatible with solvent based paints and water based paints.
- 80°C 1 hour temperature service.



CONSTRUCTION

- Backing: Water Resist crepe paper
- Adhesive: Natural rubber
- Color: Orange & Green.

TECHNICAL DATA

MASKING 510	METRIC
Paper Weight	70 Gsm.
Total Thickness	140 Micron
Peel Adhesion	2,7 N/cm
Tensile Strength	48 N/cm
Elongation at break	8%
Temperature resistance	100°C 1 hour



Physical and performance characteristics shown above are obtained following tests recommended by AFERA and UBIS. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.

STORAGE

Tape performance is guaranteed within the first 6 months. Product must be kept in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the 12 digit batch number printed on labels.

SECURITY

Product does not contain any dangerous or unhealthy components. Security data sheets are available based on directive 91/155/EC. All our tapes comply with European 2004/12/CE Packaging directive.